

60810

Oil Separator





Oil Sediment Interceptor

Specification

Josam 60810 series steel oil sediment separator with acid-resisting coating, threaded connection, flat bottom, visible double wall trap, removable sediment bucket, primary and secondary screens and heavy-duty ductile iron grates.

Formerly 61850 series.

Slot width 1/2"

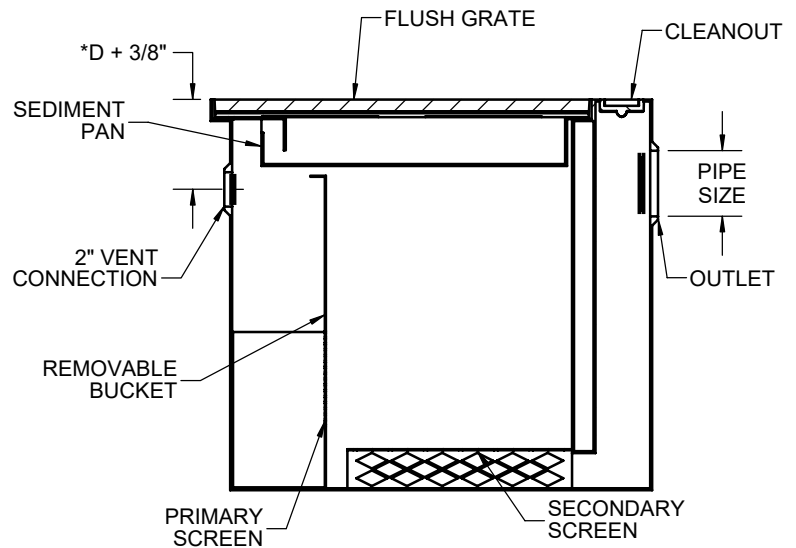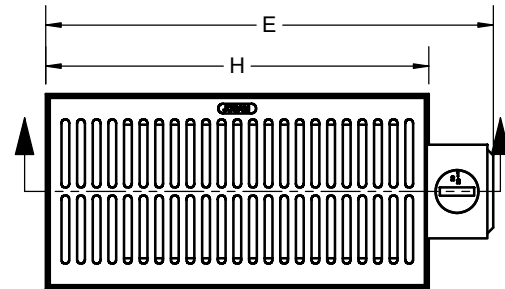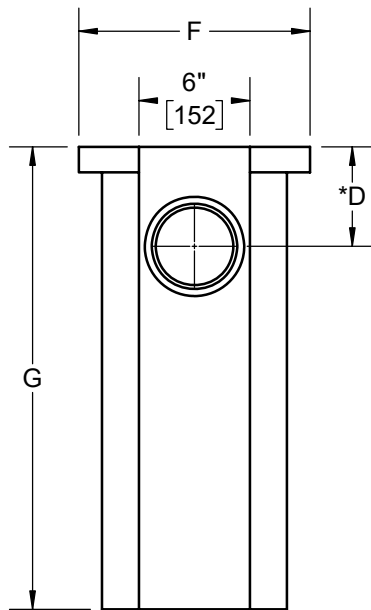

***For custom extension height:**

Specify "D" dimension= in.

New "G" dimension= in.

	Type no.	Pipe size	Grate free area (SQ. IN.)	No. of grates	Capacity (GAL.)	Sludge cap. (LBS.)	D	E	F	G	H
	60816	2	54	1	4	12	5-3/8	16-1/8	12-1/8	15	12-1/8
	60817	4	112	1	18.6	60	5-3/8	29-7/8	12-1/2	25	24-1/2
	60818	4	224	2	38.8	100	5-3/8	29-7/8	24-1/2	25	24-1/2
	60819	4	336	3	92.3	200	5-3/8	41-7/8	24-1/2	35	36-1/2

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

