

49320A

Sanitary Floor Sink

12" Square Top, 6" Deep



Specification

Josam 49320A series square cast iron 5-7/8" [149] deep Super-Flo-Septor® floor sink with acid resisting interior, double drainage flange with weepholes, bottom outlet, aluminum internal dome strainer and cast iron non-traffic, acid resisting, anti-tilting grate.

Slot width 3/8" [9.5] (ADA).

△ Separate submittal for this option available.

* Must also specify -31 or -33 option.

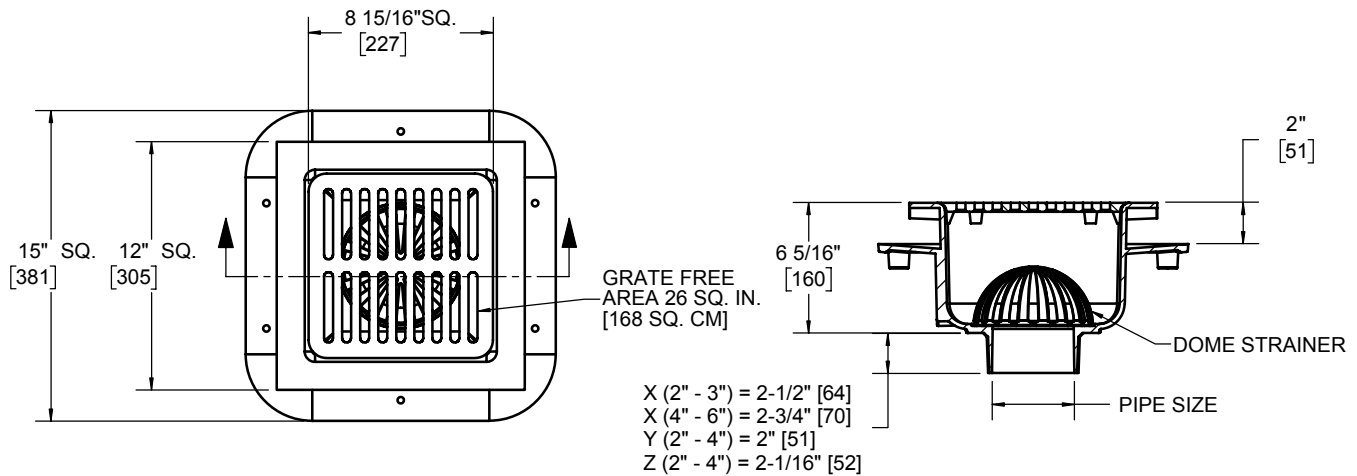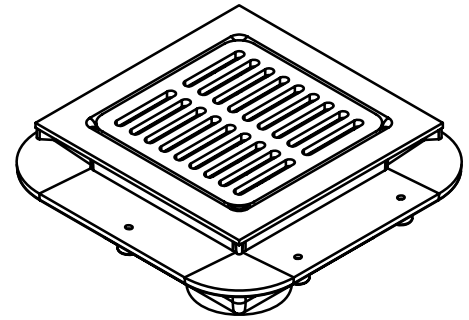

-LF	△ Less flange
-NB	△ Nickel bronze traffic top
-LG	Less grate
-3	Half (1/2) grate
-4	Three-quarter (3/4) grate
-5	Nik. extra hvy-duty grate and rim (not Super-Flo®)
-7	Full grate with 2-1/2" center opening
-8	Stainless steel depressed grate
-15	Stainless steel rim and grate
-16	Grate with 4" round funnel
-17	Grate with 6" round funnel

-18	Grate with 9" x 3-1/2" oval funnel
-31	Sediment bucket, aluminum
-33	Sediment bucket, acid resistant finish
-35	Bucket liner (stainless steel mesh)
-43	* Integral dome strainer, acid resistant finish
-45	Less internal dome strainer
-55	1/2" primer tap (6") adapter, 88450 provided (2"-4")
-C	Clamp device
-TSI	Trap seal insert (2"-4")
-X	Inside caulk outlet
-Y	Hub outlet with gasket (2"-4")
-Z	No-hub outlet (2"-4")

	Pipe size
	2"
	3"
	4"
	6"

Josam product specifications in U.S. customary units are approximate and provided for reference only. For precise measurements, please contact Josam Technical Support. Josam reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Josam products previously or subsequently sold.

Notes:

